

IRA-International Journal of Technology & Engineering ISSN 2455-4480
Proceedings of the
International Conference on Science & Engineering for Sustainable Development (2017)
Pg. no.248-256
Published by: Institute of Research Advances
<https://research-advances.org/index.php/IRAJTE>



The Internet of Things – Improving Customer Shopping Experience at Stores

Mayuri Rajas¹, M. A. Pund²

¹ Software Engineer, HSBC Technology, India.

² Department of CSE, PRMIT&R, Badnera, India.

Type of Review: Originality Check & Peer Review under the responsibility of the Scientific Committee of the Conference and The Institution of Engineers (India).

DOI: <http://dx.doi.org/10.21013/jte.ICSESD201724>

How to cite this paper:

Rajas, M., Pund, M. (2017). The Internet of Things – Improving Customer Shopping Experience at Stores. *Proceedings of the International Conference on Science & Engineering for Sustainable Development (2017)*, 248-256. doi: <http://dx.doi.org/10.21013/jte.ICSESD201724>

© International Conference on Science & Engineering for Sustainable Development & The Institution of Engineers (India).



This work is licensed under a [Creative Commons Attribution-Non Commercial 4.0 International License](https://creativecommons.org/licenses/by-nc/4.0/) subject to proper citation to the publication source of the work.

Disclaimer: The conference papers as published by the Institute of Research Advances (IRA) are the views and opinions of their respective authors and are not the views or opinions of the IRA. The IRA disclaims of any harm or loss caused due to the published content to any party.

ABSTRACT

The Internet of Things (IoT) has evolved from just being an experimental concept, and is now completely transforming the ways in which industries operate. Forbes calls the Internet of Things a giant network of connected things, with relationships between people and people, people and things, and things and things. We consider the problem of tracking physical browsing by users in indoor spaces such as retail stores[13]. Analogous to online browsing, where users choose to go to certain web pages, dwell on a subset of pages of interest to them, and click on links of interest while ignoring others, we can draw parallels in the physical setting, where a user might walk purposefully to a section of interest, dwell there for a while, gaze at specific items, and reach out for the ones that they wish to examine more closely.

As our contribution, we design techniques to explore and track each of these elements of physical browsing using a combination of a smartphone shopping app which eases the customers' physical shopping experience and BLE beacons for [5]. We believe that access to physical browsing information of shoppers in retail stores can not only provide crucial insights into shoppers' needs and interests but also reveal the effectiveness of the store layout itself.

Keywords: Physical Analytics, Physical Browsing, BLE beacon, Smartphone app

Introduction

The Internet of things (IoT) is the inter-networking of physical devices, vehicles (also referred to as "connected devices" and "smart devices"), buildings, and other items embedded with electronics, software, sensors, actuators, and network connectivity that enable these objects to collect and exchange data. In 2013 the Global Standards Initiative on Internet of Things (IoT-GSI) defined the IoT as "the infrastructure of the information society." The IoT allows objects to be sensed or controlled remotely across existing network infrastructure, creating opportunities for more direct integration of the physical world into computer-based systems, and resulting in improved efficiency, accuracy and economic benefit in addition to reduced human intervention. When IoT is augmented with sensors and actuators, the technology becomes an instance of the more general class of cyber-physical systems, which also encompasses technologies such as smart grids, smart homes, intelligent transportation and smart cities. Each thing is uniquely identifiable through its embedded computing system but is able to interoperate within the existing Internet infrastructure. Web analytics is a multi-billion dollar business today, providing tools that measure and analyze users' online browsing behavior to help companies assess the effectiveness of their websites. A typical tool will track webpage-related events, such as page views, clicks, and the degree to which different landing pages are associated with online purchases.

Most purchases today, however, occur in the physical realm, e.g., at retail stores and shopping malls. While many retailers track shoppers' purchases (e.g. as part of customer loyalty programs) in order to perform analytics, these system do not provide insight into shoppers' behavior during the shopping process, which we refer to as *physical browsing* in this paper. For example, which sections of the store did the shopper spend most of his or her time in? Which products did the shopper express interest in by gazing at them or reaching out for them? How many shoppers reached out for competing products A and B, say to compare these?

We believe that access to physical browsing information of shoppers in retail stores can not only provide crucial insights into shoppers' needs and interests but also reveal the effectiveness of the store layout itself. Furthermore, such *physical analytics* that track in-store shopping behavior could also be combined

with online information such as web browsing history or a shopping list to generate automatic alerts, say when there is a match between the physical browsing context and the online information.

The Internet of Things is transforming the Retail Industry. There is no doubt that retailers are excited about the possibilities IoT has to offer. However, when it comes to implementing IoT in their businesses, they are uncertain where to begin and the tangible value it can bring. In-Store shopping analytics and services, we adopt a vision of small data-based immersive retail analytics, where a mixture of sensor data, from personal wearable-devices and store-deployed sensors & IoT devices, is used to create real-time, individualized services for in-store shoppers. The main challenges are to use appropriate joint mining of sensor & wearable data to capture a shopper's product-level interactions, and the judicious triggering of power-hungry wearable sensors (e.g., camera) to capture only related portions of a shopper's in-store activities. The retail segment already uses IoT & "Big Data" to optimize store-level operations, such as predictive inventory management and merchandise layout planning. These innovations are, however, store-centric: they do not focus on using a shopper's in-store behavior to optimize or identify shopping-related facilities in real-time, while the user is inside the store. We believe that the joint real-time mining of sensor data, from store-deployed IoT devices and the personal mobile & wearable devices of an discrete shopper, can transform the in-store shopping experience. We present our work on the indoor positioning of users (shoppers), using a network of Bluetooth Low Energy (BLE) beacons deployed in a large wholesale shopping store[12]. Our objective is to accurately determine which product sections a user is adjacent to while traversing the store, using RSSI readings from multiple beacons, measured asynchronously on a standard commercial mobile device. We further wish to leverage the store layout (which imposes natural constraints on the movement of users) and the physical configuration of the beacon network, to produce a robust and efficient solution. We introduce our node-graph model of user location, which is designed to represent the location layout. We also present our experimental work which includes an investigation of signal characteristics along and across aisles. We propose three methods of localization[10], using a "nearest-beacon" approach as a base-line; exponentially averaged weighted range estimates; and a particle-filter method based on the RSSI attenuation model and Gaussian-noise. Our results demonstrate that the particle filter method significantly out-performs the others. Scalability also makes this method ideal for applications run on mobile devices with more limited computational capabilities.

Related Work

A future retail store should be able to address the following challenges: (i) Micro-activity recognition to identify shopper's interaction with individual items, (ii) BLE-beacon based fine-grained identification of the exact location from which the item was located/picked.

1 Summary & Discussion

Lee, S., Min, C., Yoo, C., and Song, J. Understanding customer mall behavior in an urban shopping mall using smartphone. Real-time knowledge of a shopper's in-store activities and product-level interactions include: Smart Reminder that reminds you, for example, pick up milk only if you walk past the milk section without picking up milk; and Recommender that uses knowledge of the products you've been picking so far to build a dynamic, episode-specific interest profile, and suggest complementary items. Reminders based purely on in-store location track on your smartphone, and recommendations based purely on general, longer-term customer profiles.

Y. Zeng, P. H. Pathak, C. Xu: fine-grained device motion recognition through Wi-Fi During a typical visit to a retail store, a shopper enters the store, purchases the intended products and leaves. This behavior

can be further classified into fine-grained. Each state of the shopper can be used to infer an activity related shopper's behavior.

M.A.Pund, Kadam N, Cluster Based Approach; Clustering is a popular technique used to group similar data points or objects in groups or clusters. Clustering is an important tool for outlier analysts. This technique relies on the key assumption that normal objects belong to large and dense clusters, while outliers form very small clusters.

T. Lin, L. Li and G. Lachapelle, Z. Xiao Because of the complementary nature of inertial measurement unit based pedestrian dead reckoning (PDR) and Wi-Fi positioning, the combination of both systems yields a synergetic effect resulting in higher navigation performance. Barometric sensors can provide height information for 2D/3D indoor navigation applications in multi-floor environments.

R. Faragher, R. Harle, "An Analysis of the Accuracy of Bluetooth Low Energy for Indoor Positioning Applications"[7], Our ongoing work which seeks to develop location-sensitive services to customers of a national chain of wholesale outlets (based in the UK). The project includes software components concerned with positioning, navigation, planning, and user experience.

Moller," A., Diewald, S., Roalter, L., and Kranz, M. Mobimed: Comparing object identification techniques on smartphones. Proc. of NordiCHI'12. For a shopping study, we wanted to ensure that we could identify the picking action robustly. Picking action should be distinguishable from other similar actions or gestures such as putting items back/putting items aside, pushing/pulling a door etc.

Motivation

IoT is expected to offer advanced connectivity of devices, systems, and services that goes beyond machine-to-machine (M2M) communications and covers a variety of protocols, domains, and applications.

We can show the work that indoor positioning [9] and information of products to the customer with the help of using standard mobile app and an array of BLE beacons deployed in a wholesale store. The customer can use the shopping app which connects to the BLE beacons deployed at malls while shopping and facilitates the customer with all the product details on screen. This helps the customer in ease of shopping, better decision-making with all the product information on screen, time-saving and easy payment through app. As a case study, this is of interest to researchers and practitioners as it represents a commonly discussed use-case for indoor positioning (shopping), yet relatively little work has used live data from such environments using a BLE platform.

So the scope is concerned with enhancing the experience of users shopping at a wholesale store. The store is part of a national chain and users already have access to a mobile app which has been widely adopted by its customer. This can motivate us to add location-dependent services and data, including navigation information, which can be configured by the user depending on their requirements. We could experiment with a number of positioning systems, but the work we report here is concerned with determining the position in the store, using a network of BLE Beacons and a standard consumer mobile device. Thus it is possible to frame objective of our system which is to determine which aisle the user is in, and, as accurately as possible, their position along the aisle. This provides enough information to determine which products /product categories are adjacent to the user. Furthermore, we are primarily interested in determining which products are close to the user and display the information to the customer on screen. World of physical objects is extremely diverse. They have different communication, information and processing capabilities. Henceforth our objective is to study Internet of Things which is going to be an

advanced network including normal physical objects together with computers and other advanced electronic appliances.

BLE Beacon System architecture

The system for the shopping has been proposed by Meera Radhakrishnan which illustrates the use of IoT in retail stores [14] mainly by using below tools and techniques. Following diagram illustrate the flow of the process used.

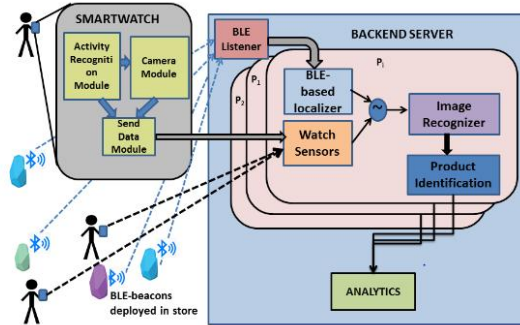


Figure: Existing system architecture. The Process of BLE Beacon technique for in-store analytics [14]

The above system is studied and analyzed this inspired us to design and develop an application which achieve the goal in the Internet of Things for improving customer shopping experience at stores.

Proposed Design and Development of App

We develop a Smartphone app for Big shopping mall store which will allow the customers to login to the store application and enjoy easy and hassle-free shopping experience with store.

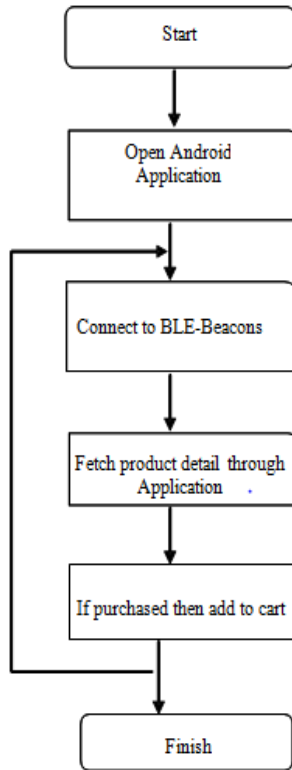


Figure : The Process of BLE Beacon technique for in-store analytics

Phase 1: Design a Bluetooth Low Energy beacon

Bluetooth Low Energy (BLE) [3] signals from battery driven beacons are at the core of the indoor location technology. It’s one of the latest technologies that has emerged and become an industry standard available on most devices today. It uses so called BLE beacons (or iBeacons) that are inexpensive, small, have a long battery life and do not require an external energy source.

The main function of Bluetooth serial module is replacing the serial port line, such as-

- A. There are two MCUs want to communicate with each other. One connects to Bluetooth master device while the other one connects to slave device. Their connection can be built once the pair is made. This Bluetooth connection is equivalently liked to a serial port line connection including RXD, TTXD signals. And they can use the Bluetooth serial module to communicate with each other.
- B. When MCU has Bluetooth salve module, it can communicate with Bluetooth adapter of computers and smart phones. Then there is a virtual communicable serial port line between MCU and computer or smart phone.
- C. The Bluetooth devices in the market mostly are salve devices, such as Bluetooth printer, Bluetooth GPS. So, we can use master module to make pair and communicate with them.

Bluetooth Serial module’s operation doesn’t need drive, and can communicate with the other Bluetooth device but communication between two Bluetooth modules requires at least two conditions:

1. The communication must be between master and slave.
2. The password must be correct.

Phase 2: Develop a Smartphone App that communicates with BLE device and displays the store information to customer.


We develop a Smartphone application which is used for shopping purpose, when customer installs application to its phone it will scan customer shopping information from a smartphone app and send request to BLE if particular information is available BLE shows information about specific items on smartphone application. If customer wants to purchase that item it will process further options like add to cart and redirect to payment page.

Experimental Results

Phase 1 Output: We have achieved connectivity with BLE beacon


Phase 2 Output:

Step 1: When user opens the Android Smart Bluetooth Connect app on Smartphone, it asks user for turning on the Bluetooth permissions.

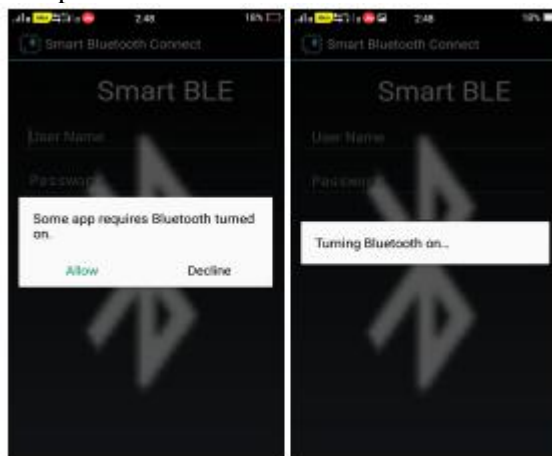


Step 2: User login window displays on the mobile screen. User can login into the Wall Mart App with registered credentials.

Step 3: When paired with Bluetooth Low Energy device, user can view the product information on mobile screen with each and every details of products.

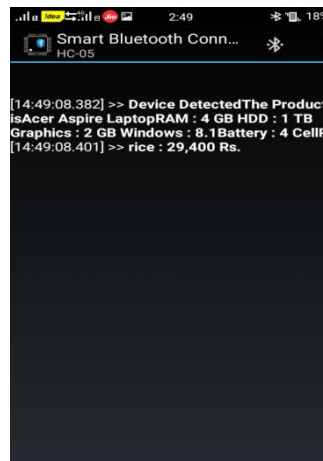

Step 4: User can also share the product information with anyone in his personal network by clicking on 'Send Log' button. User can also clear the search history.

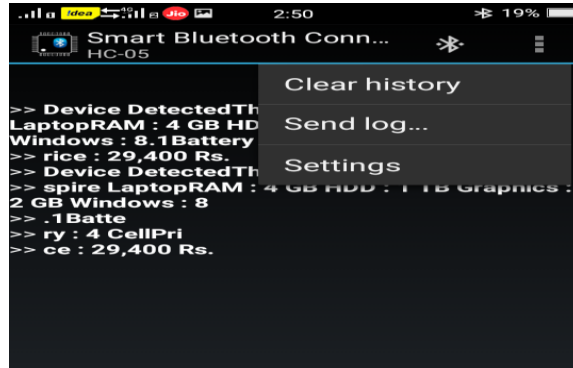

Conclusion and Future Work

In this paper, we have presented our work on indoor positioning of products, using standard mobile application and an array of BLE beacons deployed in a wholesale store. The customer uses the shopping app which connects to the BLE beacons deployed at store; while shopping which facilitates the customer to view all the product details on screen. This helps the customer in ease of hassle-free shopping, better decision-making with all the products information on screen. This helps customer in time-saving and easy payment through app. It reduces manual intervention of staff department of constantly attending the customers and serving them a number of times.

As a case study, this is of interest to researchers and practitioners as it represents a commonly discussed use-case for indoor positioning (shopping). Working in harmony, these tools can drive decision-making across marketing; leasing and operations, helping management teams create the right tenant mix, inform staffing and security operations and create engaging events and promotions. The more information you gather the more you learn, the more you can act on, the better the experience.

In future, the system can be extended of handling the automated payments and offers/best prices notifications to users whereas the BLE functionality can be extended for alerting the store operations department of the shortage of products so that the store can provide best possible services to its customers.

References

- [1] R. Faragher and R. Harle, "Location fingerprinting with bluetooth low energy beacons", *IEEE Journal on Selected Areas in Communication*, 33(11), pp. 2418–2428, 2015.
- [2] S. He, S. H. G. Chan, L. Yu and N. Liu, "Fusing noisy fingerprints with distance bounds for indoor localization," In *Proceedings of IEEE Conference on Computer Communications (INFOCOM), Kowloon, pp.2506-2514, 2015.*
- [3] Y. Zhuang, J. Yang, Y. Li L. Qi and N. El-Sheimy, "Smartphone-Based Indoor Localization with Bluetooth Low Energy Beacons", *Sensors* 16(5), 596, 2016.
- [4] Z. Yang and Y. Liu, "Quality of Trilateration: Confidence-Based Iterative Localization," in *IEEE Transactions on Parallel and Distributed Systems*, vol. 21, no. 5, pp. 631-640, May 2010.
- [5] Z. Xiao, H. Wen, A. Markham, N. Trigoni, "Robust Pedestrian Dead Reckoning (R-PDR) for Arbitrary Mobile Device Placement", In *Proceedings of the IEEE International Conference on Indoor Positioning and Indoor Navigation (IPIN)*, 27–30 October 2014.

- [6] Z. Chen, Q. Zhu, H. Jiang and Y. C. Soh, "Indoor localization using smartphone sensors and iBeacons," in Proceedings of 10th IEEE Conference on Industrial Electronics and Applications (ICIEA), Auckland, pp. 1723-1728, 2015.
- [7] T. Lin, L. Li and G. Lachapelle, "Multiple sensors integration for pedestrian indoor navigation," In Proceedings of the International Conference on Indoor Positioning and Indoor Navigation (IPIN), 2015.
- [8] Y. Li, Z. He, J. Nielsen and G. Lachapelle, "Using Wi-Fi/magnetometers for indoor location and personal navigation," In Proceedings of the International Conference on Indoor Positioning and Indoor Navigation (IPIN), 2015.
- [9] F. Karlsson, M. Karlsson, B. Bernhardsson, F. Tufvesson and M. Persson, "Sensor fused indoor positioning using dual band WiFi signal measurements," In Proceedings of European Control Conference (ECC), Linz, pp. 1669-1672, 2015.
- [10] F. Zafari and I. Papapanagiotou, "Enhancing iBeacon Based Micro-Location with Particle Filtering," in *Proceedings of IEEE Global Communications Conference (GLOBECOM)*, San Diego, CA, 2015.
- [11] P. C. Deepesh, Rashmita Rath, Akshay Tiwary, Vikram N. Rao, and N. Kanakalata. 2016. "Experiences with using iBeacons for Indoor Positioning", *In Proceedings of the 9th India Software Engineering Conference (ISEC '16)*. 2016.
- [12] R. Faragher, R. Harle, "An Analysis of the Accuracy of Bluetooth Low Energy for Indoor Positioning Applications", *Proceedings of the 27th International Technical Meeting of the Satellite Division of the Institute of Navigation*, Tampa, Florida, September 2014.
- [13] M. S. Arulampalam, S. Maskell, N. Gordon, and T. Clapp, "A tutorial on particle filters for online nonlinear/non-gaussian bayesian tracking," *Signal Processing, IEEE Transactions on*, vol. 50, no. 2, pp. 174–188, 2002.
- [14] Meera Radhakrishnan, Sougata Sen "IOT + Small Data : Transforming In-Store Shopping Analytics and Services", *Comsnets 2016: Workshop on Wild and Crazy ideas on the interplay between IOT and Big Data*
- [15] Pund, M.A., Bherde G.P. "Recent attack prevention techniques in web service applications" *International Conference on Automatic Control and Dynamic Optimization Techniques (ICACDOT)*, IEEE 1174-1180, 2016
- [16] M.A.Pund, S.R.Jadhao, P.D.Thakare "A Role of Query Optimization in Relational Database" *International Journal of Scientific & Engineering Research, IJSER*, Volume 2, Issue 1, January-2011 ISSN 2229-5518
- [17] M.A.Pund, Kadam N. "Cluster Based and Distance Based Approach for Outlier Detection" *International Journal of Advanced Research in Computer Science Vol.4 Issue-2* 2013.